



WALKER | 2025

Product Catalogue



Property in NSW, Australia.

Walker Advantages

Front-Mount Deck

Achieving a beautiful cut has been our focus from the very first Walker Mower design. Positioning the mowing deck in front of the machine is fundamental to producing high-quality results. The front-mount deck of the Walker reduces impact on the turf prior to cutting, resulting in a more consistent, carpet-like finish. This result is achieved by transferring weight from the deck caster tires which minimizes matting of the grass.


The Walker's flexible deck suspension provides smooth, consistent cutting as the front mounted deck articulates independently of the tractor following ground contour, minimizing scalping, and providing a beautiful cut.

The Walker torsion-flex carrier frame allows the deck to freely articulate and flex laterally, producing a smooth cut, even over complicated ground contours. This makes Walker Mowers ideal for mowing uneven turf.

Short Deck Coupling

Front-mount decks also create a shorter distance between the contact point of the drive tire and the contact point of the front caster tire, allowing Walker decks to precisely follow ground contours. Compared to mid-mount hanging decks used on other mowers, Walker mowing decks scalp less and leave less uncut grass in the valleys of ground contours.

Scalp less grass on the crest


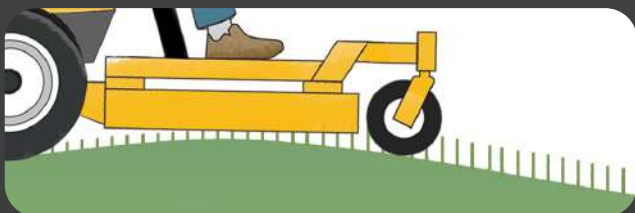


Flexible deck suspension



Deck articulates over uneven terrain

Cut more grass in the valley

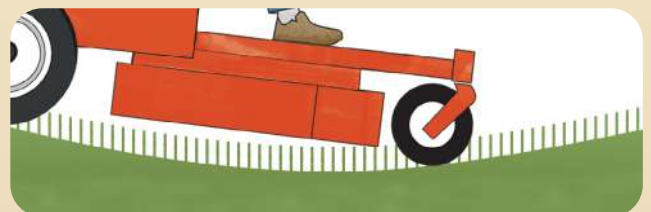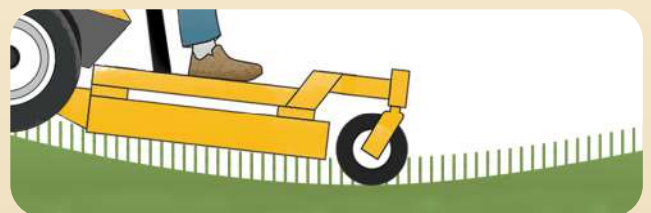



Switch a
deck



For an add-on



Easy access
to engine and
drivetrain



Interchangeable Decks and Add-ons

Whether handling grass, leaves, or debris, Walker Mowers are designed for year-round productivity. On most models, decks can easily be switched for larger or smaller collection, mulching, or discharge decks to suit the task at hand. Plus with dozens of add-ons, such as a dethatcher or dozer blades, the Walker is one of the most versatile mowers on the market.

Tilt-Open Bodies and Tilt-Up Decks

Each Walker features a tilt-open body, quickly exposing the drive belts, electrical system, engine, and drivetrain, making service and maintenance easy. No special tools or equipment are needed. Simply release the body latch, and the gas spring assisted enclosure opens up for unobstructed access to all of the Walker's working components.

All Walker decks quickly tilt-up, making maintenance tasks safe and easy. It takes seconds to unlock, lift, and secure the deck in an up position, providing access to the blades, housing, and chute. H models also have an optional Power Tilt-Up® deck lift. Walker tilt-up decks also minimize wasted space when storing the Walker Mower.

Easy and safe access
for deck cleaning
and blade maintenance



Walker Advantages

Grass Handling System® (GHS)

Walker invented the internal Grass Handling System® on its first mower, and it remains the most efficient way to vacuum grass clippings, leaves, and debris from the lawn.


Collection decks move clippings to a center, rear discharge chute where an internal blower vacuums grass clippings and debris, and then blows it directly into a compact, rear-mounted grass catcher box. The PowerFil® oscillating chute evenly packs clippings, and the Grass-Pak® full signal alerts the operator when it is time to empty the catcher. To dump clippings, the operator simply lifts the catcher with the side handles, or utilizes the optional Power Dump or Hi-Dump® add-ons from the operator seat.




Pictured: S18 with optional Power Dump

Integrated Components

Walker Mowers are engineered to ensure the entire grass collection system is internal. This intentional effort has allowed Walker Mowers to retain their compact footprint. There are no bulky tubes or bags extending beyond the footprint of the mower. By positioning the GHS blower internally, a powerful vacuum action is achieved, leaving a carpet-like appearance to your lawn in spring, summer, and fall.

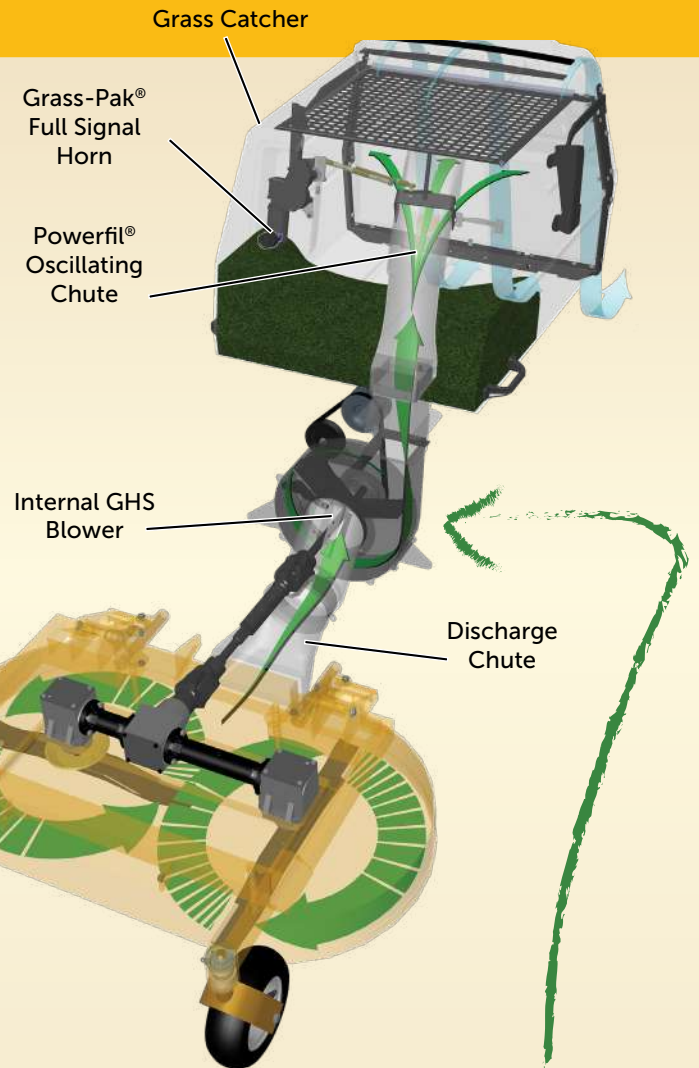

Blowers create a vacuum

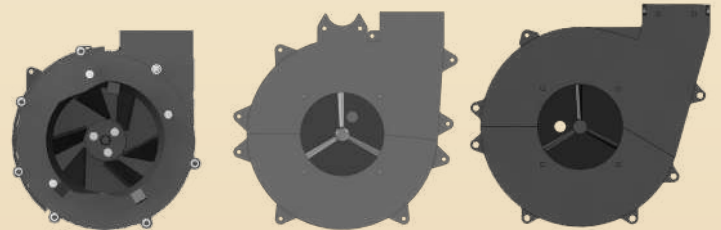

Internal GHS 10.5"
(26.67 cm) Blower
(Models C19, T, D)

Internal GHS 12.75"
(32.38 cm) Blower
(Model S)

Internal GHS 13.25"
(33.66 cm) Blower
(Model C23i)



Forward
Speed
Control



Smaller
footprint



Walker T27i with 52" deck footprint:
53" (134.62 cm) W 95" (241.30 cm) L
Versus a Z Master with 52" deck footprint:
68" (172.72 cm) W 102" (259.08 cm) L

Precision Steering and Handling

With an operator-friendly combination of finger-tip steering and the Forward Speed Control, the Walker Mower goes precisely where you want it to with little effort.

Forward Speed Control

Once in the drive position, the Forward Speed Control uses a friction lock to work as a cruise control, allowing you to control the mower by simply applying pulling pressure on the steering levers. To stop, pull the Forward Speed Control back to the Neutral-Park position.

Steering Levers

Walker Mower steering levers take control the moment pressure is applied. Each steering lever is spring-dampened, providing smooth machine operation. You can easily steer the machine by controlling both levers with a single hand, only using gentle fingertip pressure. The steering system is designed for precision steering and handling, using optimal linkage geometry and high-quality components.

Compact

Most lawns have areas with low hanging branches, narrow gates, or other obstacles that are difficult to mow. The compact size of the Walker Mower gives you the ability to mow challenging properties easily and efficiently.

The Walker Mower has a small footprint designed to get into and out of tight places like gates, between beds and trees, fence corners, and other similar landscape features.





Walker Advantages

Transmission Oil Performance System (TOPS)™

TOPS™ brings enhanced drivetrain protection and performance to all Walker Mowers equipped with Eaton Model 7 hydrostatic transmissions by actively circulating and filtering the transmission system fluid every 38 seconds.

TOPS™ includes:

- A fully-machined, billet aluminum oil pump with integrated filter mount is driven by transmission drive belt and circulates filtered oil when engine is running
- An oil filter with premium fiberglass media made in the USA for Walker
- Remote steel oil reservoir increases oil capacity by 100% and reduces oil temperature
- Fully-synthetic oil formulated specifically for extended transmission life under high loads and in extreme ambient temperatures
- ISO-VG 220 viscosity oil for superior protection and performance
- A maintenance schedule that adds 500-hour oil and filter change interval after the initial 100-hour break-in service
- Extended transmission warranty when serviced as directed, conditions apply

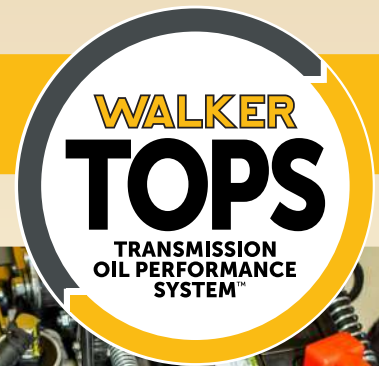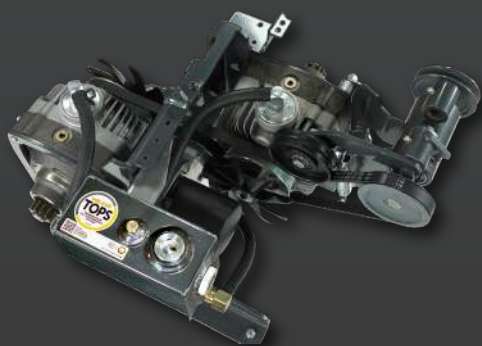

TOPS™ =
Longer Transmission Life
AND
Extended Transmission
Warranty

TOPS™ Oil
Mobil SHC™
630

TOPS™ Oil
Filter





Bob Walker (Chairman of Walker - right) and John Stead (Founder of SME Mowers - left) standing beside the first Walker mower to arrive in Australia – 1984.

Model *R*

The Model R is the perfect Walker Mower for residential properties. The belt-driven mower blades make operation smooth and quiet without compromising on the Walker Mower's distinct advantages.

The Model R provides a premium Walker experience so you can bring home fast, easy, beautiful mowing.

Lowest price,
non-collection
Walker mower,
designed
specifically
for residential
owners



Model *R*22

- 42" (107 cm), 48" (122 cm), or 54" (137 cm) side discharge deck cutting width configurations
- Belt-driven blades with dampened belt tensioner for smooth, quiet operation
- Custom blade spindles with grease nipple and bleed valve
- Molded rubber side discharge deflector shield



Accelerator® grass catcher

5 YEAR
500 HRS

The Model R features a five-year, 500-hour, caster-to-caster residential warranty. All parts and components are covered against manufacturer's defect.

Model R Standard Features

- Precision Steering and Handling
- Forward Speed Control
- 22 HP Kohler KT725 with Smart-Choke® technology for easy starts in hot and cold weather
- Hydro-Gear EZT transmissions
- Ogura® electric blade clutch and brake with easy pull/push switch operation
- Tilt-up deck and tilt-open seat
- 11.4 litres custom molded, low profile fuel tank with integrated fuel level gauge
- Flexible deck-carrier frame
- Two drive belts with spring-loaded tensioning idler pulleys: ground drive and blade drive

Model R Popular Add-ons

- Comfort Seat
- Tow Hitch
- Mulching Kit including bolt-in baffles and serrated mulching blades
- Accelerator® 3.3 bushel (4.2 cu. ft.) side-mount grass catcher
- LED Light Kit
- 48" (122 cm) Dozer Blade



Pictured: R22 with a 48" (122 cm) side discharge deck, fitted with an optional comfort seat

Model *B*

The Model B is compact and fast. It is a Walker Mower designed to run side discharge and mulch decks on difficult properties with hills, uneven terrain, and obstacles, all while leaving a beautiful cut. The Model B is configurable and versatile to meet a professional's expectations.

Discharge or
mulch, lightweight,
responsive, and
great on hills



Model *B*23

- 22.5 HP Kohler Command Pro CH680 engine
- Commercial mower with carbureted engine
- Integrated Ogura® electric clutch with Soft Start
- Comfort Seat with optional Armrests
- 17.8 litres fuel tank
- Deck/Kit options: Mulching 36"-52" (91 cm-132 cm), Discharge 36"-74" (91 cm-188 cm)

Model *B*27i

- 26.5 HP Kohler Command Pro ECH749 EFI engine
- Superior fuel efficiency and economy
- Integrated Ogura® electric clutch with Soft Start
- Comfort Seat with optional Armrests
- 17.8 litres fuel tank
- Deck/Kit options: Mulching 36"-52" (91 cm-132 cm), Discharge 36"-74" (91 cm-188 cm)

Model B Standard Features

- Precision Steering and Handling
- Forward Speed Control
- High-capacity, commercial engine air filtration
- Hydro-Gear ZT3100 transmissions
- 13 km/h maximum ground speed
- Flexible deck-carrier frame
- Tilt-up deck and tilt-open body

Model B Popular Add-ons

- Utility Bed
- 48" (122 cm) Dozer Blade
- LED Headlights
- Suspension Seat
- Big Tire Kit
- Tow Hitch
- Dethatcher
- Implement Hitch
- Accelerator® 116L side-mount grass catcher



*Pictured: B27i with a 48" (122 cm) mulching deck.
Shown with optional utility bed and optional suspension seat.*

Model *H*

The Walker Model H stands alone in its class for high production mowing and improved return on investment. When fast, beautiful results are demanded on vastly different properties, turf types, and conditions, the Model H delivers for the most discerning operators. A variety of attachments and add-ons keep the Model H productive year-round with excellent results.

High production,
versatile
discharge or
mulching,
commercial
mower



Model *H*24d

- 23.7 HP Kohler KDW1003 diesel engine
- Rubber isolation engine mounts
- Liquid cooled with self-cleaning radiator
- Standard ROPS and Utility Bed

Model *H*38i

- 38 HP Kohler Command Pro ECH980 EFI engine
- Increased displacement and torque
- Cyclonic high-capacity air filter

Model H Standard Features

- Precision Steering and Handling
- Forward Speed Control
- Grammer 4-way adjustable Suspension Seat
- High capacity, commercial engine air filtration
- Hydro-Gear ZT3400 transmissions
- 3 Model H-specific mowing decks with integrated Deck Height Adjuster and Adjustable Foot Rest
- Flexible deck-carrier frame
- Tilt-up deck and tilt-open body
- 35.6 litres fuel capacity, dual tanks
- Deck/Kit options: Mulching 48"-61" (122 cm-155 cm), Discharge 48"-74" (122 cm-188 cm)
- ROPS (standard on all MH Models in Australia)

Model H Popular Add-ons

- Power Tilt-Up® deck lift
- LED Headlights
- Deck arm adapter kit, allowing compatibility with six additional Walker mowing decks
- 60" (152 cm) Rotary Broom
- 60" (152 cm) Dozer Blade



Pictured: H38i (left, middle) with a 64" (163 cm) rear discharge deck and H24d (right) with a 52" (132 cm) rear discharge deck.

Model S

The Model S is the quintessential Walker Mower. Inspired by the original 1977 prototype, the Model S is simple and easy to operate, and very efficient at mowing residential properties. With Walker's Grass Handling System®, a patented Blower Shaft PTO® design, and reduced weight and cost, the Model S is the perfect entry-level mower for experiencing Walker's signature beautiful cut and zero-turn productivity.

Entry-level
collection
mower, ideal
for smaller
properties



Model S18

- 18 HP Briggs and Stratton Vanguard engine
- Commercial rated compact V-Twin with pressure oil lubrication
- 11.9 km/h ground speed
- 15.1 litres fuel tank
- Deck/Kit options: Collection 36"-48" (91 cm-122 cm), Mulching 36"-48" (91 cm-122 cm), Discharge 36"-56" (91 cm-142 cm)



Dethatcher

Model S Standard Features

- Precision Steering and Handling
- Forward Speed Control
- Grass Handling System® (GHS)
- 247L grass catcher
- High capacity, commercial engine air filtration
- Hydro-Gear ZT3100 transmissions
- Tilt-up decks and tilt-open body
- Flexible deck-carrier frame
- 12.75" (32.38 cm) Thru-Shaft® PTO GHS blower
- Oscillating PowerFil® chute with Grass-Pak® full signal

Model S Popular Add-ons

- Power Dump
- LED Headlights
- Adjustable Footrests
- Dethatcher
- 48" (122 cm) Dozer Blade
- Comfort Seat with optional Armrests



Pictured: S18 with a 42" (107 cm) collection deck and optional comfort seat with armrests

Model C

The Model C is the original Walker commercial lawn mower. Since its introduction in 1986, the Model C has been continually refined and improved with the commercial operator in mind, especially those who maintain residential properties. The Model C is a compact and versatile mower with impressive productivity.

Commercial
collection
mower that can
run powerful
add-ons



Model C19

- 19 HP Kohler Command Pro CH620 engine
- 247L or 352L grass catcher option
- 15.1 litres fuel tank
- Eaton Model 7 transmissions with ductile cast iron gearbox final drives
- Transmission Oil Performance System (TOPS)™
- Deck/Kit options: Collection 36"-48" (91 cm-122 cm), Mulching 36"-52" (91 cm-132 cm), Discharge 36"-60" (91 cm-152 cm)

Model C23i

- 23 HP Kohler Command Pro ECH730 EFI engine
- 247L or 352L grass catcher option
- 17.8 litres fuel tank
- Deck/Kit options: Collection 42 or 52" (107 cm-132 cm), Mulching 42-52" (107 cm-132 cm), Discharge 42-60" (107 cm-152 cm)

Model C Standard Features

- Precision Steering and Handling
- Forward Speed Control
- Grass Handling System® (GHS)
- 247L grass catcher
- Well balanced for superior hillside stability

Model C Popular Add-ons

- LED Headlights
- Dethatcher
- Implement Hitch with electric ram lift
- Comfort Seat (standard on C23i)
- Power Dump
- 48" (122 cm) Dozer Blade

Comfort
Seat



Pictured: C23i with a 52" (132 cm) collection deck, and optional 10.0 grass catcher.


Model C23i

The C23i incorporates years of development and testing to deliver an upgraded mowing experience that includes efficiency, reliability and low maintenance. The mower is designed to be fast, quiet, simple, and easy to maintain while still providing the top-notch performance that you expect from a Walker Mower.

The next
generation
of fast, easy,
beautiful
mowing



Unique Swing-Away Jackshaft

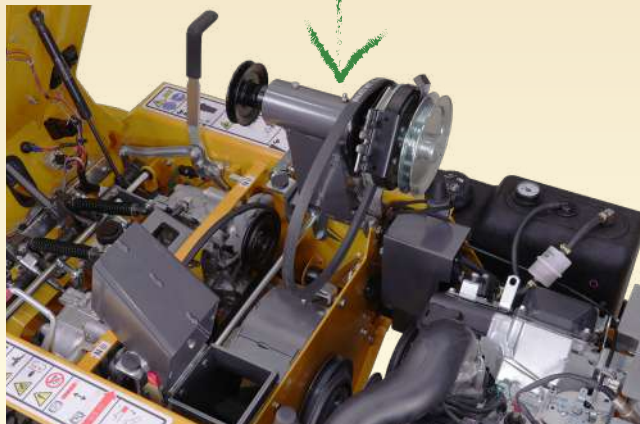

Gives unobstructed access to GHS blower and other components

Two Piece Blower Housing



Provides easier maintenance and removal from above and below

Fast

This well-balanced mower with a powerful 13.25" thru-shaft GHS blower, and Hydro-Gear ZT3100 transaxles can mow and collect grass at speeds up to 13 KM/H.



Quiet

The new design of the Model C23i features in-line power delivery utilizing a swing-away jackshaft and electric PTO clutch, eliminating the need for a PTO gearbox, making quieter operation.

Easy Maintenance

The simplified body and chassis design of the Model C23i has less belts and pulleys, less bearings, no gearboxes, and a reduced parts count. In addition to an easier tilt-open seat panel, the two-piece GHS blower housing design allows for easier maintenance and repairs.



Affordable

With 25% fewer overall total machine components, and 64% less individual chassis parts compared to the Model T, the Model C23i provides excellent performance at a lower price.

Model T

The Model T is the standard for what commercial operators expect from a lawn mower. Intended specifically for commercial use, every aspect of the Model T has been designed to meet the most demanding expectations of operators who want fast and easy mowing with beautiful results. It is the go-to Walker for commercial operations and a favorite among discerning customers.

The go-to
collection
mower for
power and
versatility



Model T23

- 23 HP Kohler Command Pro CH680 engine
- Commercial mower with carbureted engine
- Comfort Seat with optional Armrests
- Non-collection version is available
- Deck/Kit options: Collection 36"-52" (91 cm-132 cm), Mulching 36"-52" (91 cm-132 cm), Discharge 36"-74" (91 cm-188 cm)

Model T27i

- 26.5 HP Kohler Command Pro ECH749 EFI engine
- Superior fuel efficiency
- Comfort Seat with optional Armrests
- Non-collection version is available
- Deck/Kit options: Collection 36"-52" (91 cm-132 cm), Mulching 36"-52" (91 cm-132 cm), Discharge 36"-74" (91 cm-188 cm)



Hi-Dump®



Model T Standard Features

- Precision Steering and Handling
- Forward Speed Control
- Grass Handling System® (GHS)
- 10 bushel (12.4 cu. ft.) grass catcher
- Commercial air filter with remote air intake and turbine pre-cleaner
- Eaton Model 7 transmissions with ductile cast iron gearbox final drives
- Flexible deck-carrier frame
- Tilt-up deck and tilt-open body
- 17.8 litres fuel tank
- 10.5" (27 cm) GHS blower
- Transmission Oil Performance System (TOPS)™

Model T Popular Add-ons

- Hi-Dump® grass catcher system raises 171 cm with automatic catcher door actuation
- Power Dump
- LED Headlights
- Dethatcher
- Implement Hitch with electric ram lift
- 48" (122 cm) Dozer Blade

Pictured: T27i with a 48" (122 cm) collection deck.

Model *D*

The Model D is an industrial-grade Walker Mower with impressive power and agility. The Model D is the only diesel-powered Walker Mower equipped with the Walker Grass Handling System® (GHS). The Model D effortlessly handles the harshest mowing environments and extended running times without compromising efficiency or power.

Diesel-
powered,
versatile,
commercial
collection
mower



Model *D*21d

- 20.9 HP three cylinder Kubota D722 diesel engine
- 10 bushel (12.4 cu. ft.) grass catcher
- Deck/Kit options: Collection 36"-52" (91 cm-132 cm), Mulching 36"-52" (91 cm-132 cm), Discharge 36"-74" (91 cm-188 cm)



Model D Standard Features

- Precision Steering and Handling
- Forward Speed Control
- Grass Handling System® (GHS)
- Automatic glow plug preheat
- Transverse engine mount
- Liquid-cooled with self-cleaning radiator
- Impressive 34 ft-lb torque
- High-capacity, commercial air filter with remote air intake and turbine pre-cleaner
- Eaton Model 7 transmissions with ductile cast iron gearbox final drives
- Grammer four-way adjustable Suspension Seat
- Tilt-up deck and tilt-open body
- Flexible deck-carrier frame
- High output 40-amp charging system
- 10.5" (27 cm) GHS blower
- Oscillating PowerFil® chute with Grass-Pak® full signal
- Transmission Oil Performance System (TOPS)™

Model D Popular Add-ons

- Hi-Dump® grass catcher system raises 171 cm with automatic catcher door actuation
- Power Dump
- LED Headlights
- Dethatcher
- Implement Hitch with electric ram lift
- 48" (122 cm) Dozer Blade

Walker Decks: Mulching and Collection

Each Walker deck is uniquely configured to meet a very specific performance need. Whether the most important consideration in looking for the perfect deck is cutting width, handling grass clippings, material capacity, or grass type, there is a Walker deck that will meet the specific maintenance need.

Mulching Decks and Mulching Kits

Mulching decks and kits are designed to efficiently re-cut material to fine particles and return them to the turf, leaving a beautiful cut.

DM36-2

- 36" (91 cm)
- Gear Drive
- Compatible with Models S, C19, T, D, and B

DM42-2

- 42" (107 cm)
- Gear Drive
- Compatible with Models S, C, T, D, and B

Model R Mulch Kits

- Mulch Kit for 42" or 48"
- P/N 1692-19 & 1692-20
- Compatible with Model R only

Re-Cut Kit

- Featuring a single bar with upper and lower swinging blades to create a finer mulch.
- Compatible with Model R 42" & 48" (DS42-R & DS48-R), and select Model B decks (DS42B-2 & DS48B-2).

DS52-3 Mulch Kit

- Mulch Kit for DS52-3
- P/N 8691
- Compatible with Models C, T, D, B, and H*

DS61-3 Mulch Kit

- Mulch Kit for DS61-3
- P/N 2692-1
- Compatible with Model H only



Recirculating blade hubs

Unique housing designed to direct air flow



Serrated wing blades for fine mulching

*Requires Deck Arm Adapter Kit P/N 2430-10.

Standard vs Reverse Rotation

Standard rotation blades come together at the front of the deck, moving material directly into the rear discharge chute. Standard rotation decks are ideal for users who need to collect thick, heavy clippings, including leaves and other yard debris.

Reverse rotation blades come together at the rear of the deck, moving material around the edges of the deck before it is channeled into the discharge chute. Reverse rotation decks are ideal for users looking for exceptional cut quality, in mowing conditions without wet, heavy clippings or debris.

Collection Decks

Collection decks are compatible with the Walker Grass Handling System® (GHS) Models S, C, T, and D. Clippings are discharged from the deck through the internal blower and discharge chute, and stored in the GHS catcher box.

DC36R-2

- 36" (91 cm)
- Reverse Rotation
- Compatible with Models S, C19, T, and D

DC48V-2

- 48" (122 cm)
- Standard Rotation
- Compatible with Models C, T, and D

DC42V-2

- 42" (107 cm)
- Standard Rotation
- Compatible with Models S, C, T, and D

DC52RV-2

- 52" (132 cm)
- Reverse Rotation
- Compatible with Models T and D

DC42SV-2

- 42" (107 cm)
- Standard Rotation
- Compatible with Models S & C23i.



DC48V-2 48" Standard Rotation Deck

Blade Options Standard

7705-1 (x1)

7705-2 (x1)

Walker Decks: Side and Rear Discharge

Side Discharge Decks

Compatible with all Walker Mowers, side discharge decks cleanly, and evenly, discharge cut grass from under the deck housing.

DS36-2

- 36" (91 cm)
- Gear Drive
- Compatible with Models S, C19, T, D, and B

DS42B-2

- 42" (107 cm)
- Gear Drive
- Compatible with Models S, C, T, D, and B
- Mulch Baffle

DS48B-2

- 48" (122 cm)
- Gear Drive
- Compatible with Models S18, C, T, D, B, and H*
- Mulch Baffle

DS52-3

- 52" (132 cm)
- Belt Drive
- Compatible with Models C, T, D, and B

DS56-2

- 56" (142 cm)
- Gear Drive
- Compatible with Models S18, C, T, D, B, and H*

DS60-3

- 60" (153 cm)
- Belt Drive
- Compatible with Models C23i and B

DS61-3

- 61" (155 cm)
- Belt Drive
- Compatible with Model H only

DS74-2

- 74" (188 cm)
- Gear Drive
- Compatible with Models T, D, B, and H*
- Recommended for flat properties only

Sizes range from 36"



*Requires Deck Arm Adapter Kit P/N 2430-10.

DC48V-2 Gear Drive Deck
(top cover removed)



Gear Drive:
Smooth, exceptional cut quality

DS60-3 Belt Drive Deck
(top cover removed)



Belt Drive:
Flexible mowing, even
in rough conditions

Gear vs Belt Drive

Walker gear-driven decks utilize aluminum or cast iron gearboxes with bevel Zerol gear technology for durable and quiet function. The timed blades provide exceptional cut quality and striping, and allow a compact design for improved trimming and maneuverability.

Walker belt-driven decks use a robust spindle and belt-tensioning idler design, and are best suited for rougher mowing conditions with debris or ground contact occurring. Walker belt-driven decks feature tool-free belt change and easy-to-maintain spindles and components.

Rear Discharge Decks

Designed specifically for Model H mowers with high production and fast mowing speeds, Walker rear discharge decks process clippings numerous times before cleanly and evenly discharging clippings out the back of the deck, leaving an evenly cut turf.

DR52-3

- 52" (132 cm)
- Belt Drive
- Compatible with Model H only

DR64-3

- 64" (163 cm)
- Belt Drive
- Compatible with Model H only



H24d with
52" rear
discharge
deck

Walker Decks: Multi-Deck and Add-ons


One deck, multiple uses

DU42-2 or DU48-2

- 42" (107cm) or 48" (122 cm)
- Compatible with Models S18, C, T, and D
- Collection
- Mulching
- Side Discharge



Collection configuration



Side Discharge configuration

Available Deck Add-ons*

- Dethatcher attachment
- Pneumatic Deck Tires
- Deck Height Adjuster
- Adjustable Footrests
- Spyker® Spreader and Mount
- Deck Cuff Kit
- Curb Jumper
- Power Tilt-Up® Deck Lift for S61, R52, R64 decks (Model H only)
- Accelerator® Grass Catcher Kit
- Boom Sprayer attachment
- Breakaway Blades

*Visit walker.com for deck add-on compatibility.

Breakaway Blades

Use Breakaway Blades in mowing conditions with frequent ground contact and/or excessive debris. Breakaway Blades lessen the impact and shock loading on the deck drivetrain and reduce blade damage. Cutting blades can be easily replaced or removed for sharpening.

S56.....	P/N 5705-32
S42.....	P/N 5705-33
S74.....	P/N 5705-34
S48.....	P/N 7705-8

Reduce damage when mowing debris

MULTI DECKS

DU42-2 42" 3-Way Multi-Deck Grass collection/ Side discharge/Mulch



Standard Blades	
Set 1	Set 2
938 (x2)	925 (x2)
939 (x2)	927 (x2)

DU48-2 48" 3-Way Multi-Deck Grass collection/ Side discharge/Mulch



Standard Blades	
Set 1	Set 2
938 (x2)	925 (x2)
939 (x2)	927 (x2)



Boom Sprayer



Breakaway Blades

Deck/Kit Compatibility

Decks/Kits	Models						
	S	C	T	D	R	B	H
Collection							
DC36R-2	●	★	●	●			
DC42SV-2	●	X					
DC42V-2		★	●	●			
DC48V-2		★	●	●			
DC52RV-2		●	●	●			
Discharge							
DS36-2	●	★	●	●		●	
DS42B-2	●	●	●	●		●	
DS42-R					●		
DS48-R					●		
DS48B-2	●	●	●	●		●	▲
DS52-3		●	●	●		●	
DR52-3							●
DS54-R					●		
DS56-2	●	●	●	●		●	▲
DS60-3		X				●	
DS61-3							●
DR64-3							●
DS74-2		X	●	●		●	▲
Mulching							
DM36-2	●	★	●	●		●	
DM42-2	●	●	●	●		●	
Multi-Deck							
DU42-2	●	●	●	●			
DU48-2	●	●	●	●			

- Compatible. ● Models C19 and C23i only.
 ▲ Requires Deck Arm Adapter Kit P/N 2430-10.
 ★ C19 only. X C23i only.

Collection




Discharge



Mulching



Multi-Deck

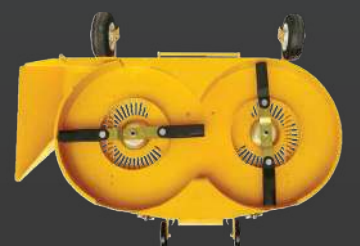

Add-ons: Implements

Implements mount interchangeably on most Walker models using the quick-change hitch system and require the use of the Implement Hitch. Tail Weights may also be needed for counterbalancing.

Implement Hitch

The Implement Hitch replaces the mower deck and installs on the tractor in just a few minutes. Implements then slide onto the hitch and lock in place with the flip of a lever for true "quick-change" capability. The Hitch assembly includes operator footrests and an electric power lift. A switch raises and lowers implements and is mounted on the Forward Speed Control lever for convenient operation.

Models C19, T, D:.....P/N H10

Model H:.....P/N H19

Models B, C23i:.....P/N H22



The Implement Hitch allows the Walker to use implements

Option: Tail Weights

Tail weights are used for counterbalancing many Walker front-mounted add-ons such as a snowblower, loader bucket, or rotary broom. Tail weights also improve handling when using large decks on the lighter models. The cast-iron weights bolt directly to the chassis frame or the split-axle tail.

Model B: 50 lb.....P/N 4647-10

Extra 50 lb weight.....P/N 4647-11

Model H: 50 lb.....P/N 2647-10

Model H: 55 lb.....P/N 2647-11

Extra 55 lb weight.....P/N 2647-6

Model C19, T, D: 85 lb.....P/N 7647

Extra 10 lb weight.....P/N 7647-5

Model R: 80 lb.....P/N 1647-10

Tail Weights offset the weight of an implement to maintain balance



Replaceable
wear edges



Dozer Blade (48" or 60")

The Dozer Blade is a powerful tool able to tackle a variety of tasks, from cleaning up after a snow storm to backfilling irrigation trenches. It is designed and built by Walker, using the latest fabrication technology, precision tooling, and quality workmanship.

Blade design features a simple foot-actuated angle-adjust mechanism that allows the operator to quickly set the blade to five different positions. The design also employs trip-over protection with adjustable preload, and $\pm 5^\circ$ of lateral articulation to follow ground contour for even cleaning over the full width of the blade, and integrated footrests. The steel cutting edge is replaceable, with four mounting positions for extended life.

Requires Implement Hitch (see page 44).

Models C, T, D, B, H: 48" (122 cm) P/N H11

Models T, D, H: 60" (152 cm) P/N H16

An optional Polyurethane Wear Edge Kit is available for use on sensitive surfaces:

48" (122 cm) P/N 6625-10

60" (152 cm) P/N 6625-11

Loader Bucket

A versatile tool for landscaping work, the Loader Bucket will push, scoop, haul, and grade dirt, stone, gravel, and mulch. It lifts approximately 180 lb (82kg), holds 2.25 cu. ft. (64 liter) of material, and features 14" (36 cm) ground clearance for transport. The Loader Bucket has a high-strength steel cutting edge with tilting action, powered by a 500 lb electric ram. It is available for use on models T and D. It requires an Implement Hitch (see page 44). **P/N H18**



Add-ons: Implements



Boom Sprayer

A helpful attachment for property maintenance, the Boom Sprayer easily mounts to most 42", 48", and 52" Walker decks, and offers a 96" (244 cm) spray pattern, allowing operators to apply fertilizer or weed control in an efficient manner. A spray gun with a 20-foot (6 meter) hose allows the operator to leave the mower and apply liquid material to all landscape features. The spray tip adjusts to offer varying output, from a mist to a 35-foot (11 meter) stream. The 25 gallon (95 liter) tank allows easy cleaning of the tank and spray system. **P/N A16**

Mounting on 52" decks requires two Rear Sprayer Supports **P/N B037**



ROPS

The Walker Roll-Over Protection Structure (ROPS) consists of a high-strength steel roll bar and retracting inertial-reel seat belt. The ROPS system features a hinged roll bar that can be folded down for convenient transport and storage.

Models C19, D, T..... P/N A37*

**Seat belt ordered separately. Suspension Seat (6103-14) P/N 2302-8, Standard Seat (5103) P/N 5103-9, Comfort Seat (6104-31) P/N 6104-7.*

ROPS comes standard on all Model H



Add-ons: Attachments



Lift and
remove
thatch
quickly
and easily



Tool-free
installation

Dethatcher

The Dethatcher on the front of the Walker Mower is the ideal setup to quickly dethatch and mow a property. When used with the Grass Handling System® on Models S, C, T, and D, lawn thatch and debris are lifted, vacuumed, and collected in one pass. The Dethatcher features front-gauge wheels which allow the dethatching tines to maintain consistent depth on uneven or articulating properties.

The Dethatcher quickly attaches to the front of most 42", 48", and 52" Walker gear-driven decks with integrated adjustable mounting saddles. A lift lever with foot trigger lowers and raises the Dethatcher for easy transport when driving between lawn areas. Gauge wheels are adjustable to set and tune tine depth. The foldable handle allows the Dethatcher to be stored vertically against a shop wall or tied down against a trailer sidewall. **P/N A10**

Optional Wall Mount:

Securely and compactly mount the Dethatcher off the floor in a space-saving manner on your shop or garage wall. **P/N 6606-11**



Add-ons: Options

Comfort Seat

The Comfort Seat, standard on Models T, B, and C23i is custom-designed with improved seat-bolstering and back profile for increased posture and support. The base cushion features Elastomeric Vibration Control which greatly increases comfort during operation. Matching armrests are available as an optional upgrade.

- Models T, D..... P/N 6104-8**
- Models S, C19..... P/N 6104-9**
- Model R..... P/N 6104-10**

Suspension Seat

Made by Grammer, this full-spring Suspension Seat includes dampening and adjustments for back angle, lumbar support, and operator weight. Armrests are standard on the Suspension Seat. This seat is standard on Models D21d and H24d, and is required for a ROPS seat belt. **P/N 6103-14**

- Model B Mounting Kit..... P/N 6103-51**
- Model C19 Mounting Kit..... P/N 6103-52**
- Model H Mounting Kit..... P/N 6103-53**
- Model T Mounting Kit..... P/N 6103-54**

Armrests

Foldable Armrests can be added to the Comfort or Standard Seat. They offer enhanced operator comfort and security. Armrests conveniently fold up when not in use. Armrests are standard equipment on the Suspension Seat.


- Standard Seat:..... P/N 5885**
- Comfort Seat:..... P/N 6104-17**



Comfort Seat embroidery



Suspension Seat absorbs bumps as the mower goes over rough terrain

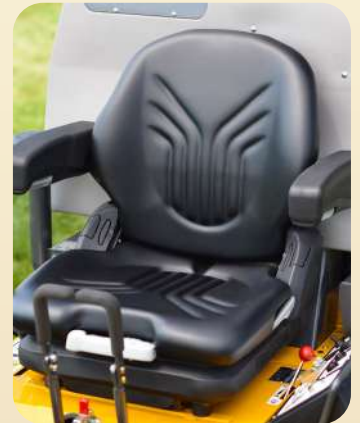



Increased safety
for early morning
and evening work

Utility Bed

The Utility Bed can replace the rear body assembly on the Model B, providing convenient storage and transport of material or tools. With manual dump functionality, the Utility Bed also adds all-season versatility to the Model B or H24d. **P/N 4650-2**

Headlights

The LED Headlights incorporate a durable, cast aluminum housing with four LED lamps in each light assembly. The lights are positioned to illuminate the front and sides of the mower deck, providing increased situational awareness and safety for both the operator and bystanders.

Models C19, H38i, H24d **P/N 5989-13**
Model B..... **P/N 5989-17**
Model S..... **P/N 5989-14**
Model R..... **P/N 5989-15**
Models D, T..... **P/N 7989-14**
Model H38i..... **P/N 2989-12**

Cup Holder

Featuring a unique front-mount design, the Cup Holder gives the operator easy access to his or her drink. The Cup Holder frame is powder-coated metal and incorporates rubber tabs to secure different sized and shaped cups and tumblers up to 3.25" in diameter. It is not Model R compatible. **P/N 5744-9**

Instrument Panel Cover

This sturdy canvas Instrument Panel Cover protects the instrument panel on Walker Models D and T when parked outside or trailered in rain. **P/N 7307-2**



Add-ons: Options

Power Dump

The Power Dump provides convenience and time savings to commercial mowing companies and homeowners alike by giving the operator the ability to dump the grass catcher from the operator seat. A toggle switch operates the 12-volt electric linear actuator that provides the dumping and door-opening action, which completes in about 10 seconds.

Model S18 (for 7.0 bu.).....P/N A48

Model C19 (for 7.0 bu.)P/N A46

Model C23i (for 10.0 bu.)P/N A52

Models C19, T, D (for 10.0 bu.)P/N A51

Hi-Dump®

The Walker Hi-Dump® raises up 67" (170 cm) and dumps collected grass and debris into a truck or trailer in a 20-second cycle without the operator ever needing to leave the seat. Powered by a 12-volt electric/hydraulic system, the lifting and dumping functions work independently and are controlled by two toggle switches near the operator's seat. It is available for Models D and T. **P/N A21**



Dump grass
without leaving
your seat



Lifts up 170cm



Turn collection
into rear
discharge



Prevent
clogging
in wet
conditions



Transfer
power
when not
using GHS



No-Catch Deflector

The No-Catch Deflector easily installs in the grass catcher door frame to allow "non-collection" rear-discharge mowing with GHS models. Grass clippings are safely deflected downward and spread across the door opening.

7.0 bu. Catcher..... P/N 7500-2
10.0 bu. Catcher..... P/N 8500-2

Large Hole Screen

When mowing in wet conditions, this screen with 3/4" holes stays cleaner to help prevent clogging. This screen easily interchanges with the standard screen.

7.0 bu. Catcher..... P/N 7512-13
10.0 bu. Catcher..... P/N 7512-11

GHS Blower Lockout

The Blower Lockout disengages the Grass Handling System® (GHS) blower to reduce noise and increase power when using a side discharge deck, mulching deck, or PTO-driven attachment or implement. Disengaging the blower also prevents grass, or debris from entering the grass catcher. **P/N 7541-1**

Dump Bins

These two bins slide into the Walker 7-bushel and 10-bushel catcher,s making the dumping of grass clippings much easier by dividing the weight. This is especially useful for single operators working by themselves.

Set of Dump Bins.....P/N A17 (7 bushels)
A19 (10 bushels)

Add-ons: Options

Deck Height Adjuster

The mechanical Deck Height Adjuster installs directly onto the Walker mowing deck. It offers quick and easy cutting height adjustments in 1/4" increments, using a single hand lever within reach of the operator's seat.

36" Height Adjuster Kit..... P/N A22

42" Height Adjuster Kit..... P/N A23

48" Height Adjuster Kit..... P/N A24

52" Collection Height Adjuster Kit P/N A25

52" Side Discharge Height Adjuster Kit..... P/N A26

62" Side Discharge Height Adjuster Kit P/N A27

56" Side Discharge Height Adjuster Kit P/N A28

Model R 42" & 48" Height Adjuster Kit....P/N 1900R

**A26 S/N 163318 and prior S52 decks.*

***A27 S/N 187999 and prior S62 decks.*



Fine-tune cutting height



Easy to use ramp

Curb Jumper

This 36" (91 cm) wide curb ramp allows Walker Mowers to easily back over a standard curb for access to medians, landscape areas in parking lots, and raised beds. When not in use, the ramp stows on the mowing deck carrier frame and functions as an expanded footrest.

Standard Decks P/N 5597

Deck Height Adjuster Decks..... P/N 5597-1

Store as
a footrest





Power Tilt-Up®

Available for the Model H, the Power Tilt-Up® makes it easy to automatically tilt up decks for maintenance, transportation and storage. Tilt-up action uses a 12-volt electric linear-actuator easily mounted to any Model H mower equipped with an S61, R52, or R64 deck with adjustable footrests. The use of a tailweight is suggested when using this option (see page 44).

Model H38i..... P/N A35

Model H24d..... P/N A36

Avoid
heavy lifting;
mechanically
lift decks

Control panel
on the rear of
the mower for
safe operation



1800W - Electric Deck Lift

The Walker Electric Deck Winch is engineered and manufactured by Stevens Group (Walker NZ Distributor) to achieve acclimatized performance for Walker customers Worldwide. It is compatible with a wide range of Walker Models and can be easily installed by your Walker Dealer. It raises your deck up 90° without manual lifting to avoid back pain or strain. Drive over rough terrain or stones with the deck raised to minimise wear and tear. Increases your Walker's traction on hilly and wet areas. Effective for mowing on overgrown areas, and significantly improves your Walker's leaf collection function.



Add-ons: Options

Deck Cuff

Airflow and deck contour tend to push grass at the very edges of the deck away from the cutting blades. The Deck Cuff acts as a channel to direct grass at the edge of the deck into the blade cutting path, restoring full deck cutting width.

DC36R-2 P/N 7704-2

DC52RV-2 P/N 7704-5

Spread Axle Tail Wheel

The Spread Axle Tail Wheels track in line with the drive tires for grass conditions where the center tail wheel track may not be preferred. This offers a clean look to the striping, improves straight tracking, and also contributes to stability when operating on hillsides for Models C19, T & D.

Spread Axle Assembly P/N 7420-3

Tank Relocation Kit Required for D21d P/N 7420-8




Wider wheel base =
better hillside stability



Direct grass into
cutting path



Less turning resistance
with greater agility

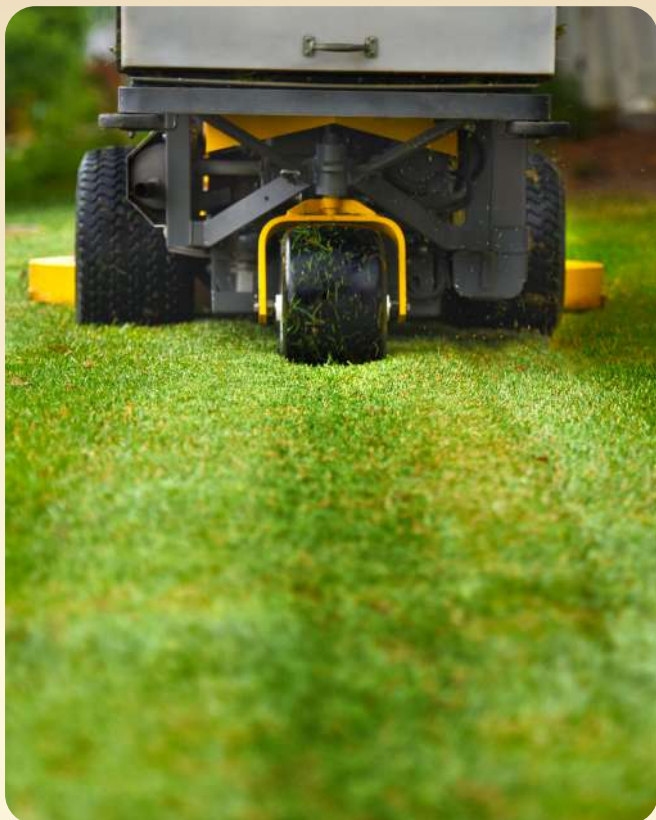

Extra Wide Tail Wheel

The Extra Wide Tail Wheel creates a single, uniform tire stripe in the middle of the cutting width for a clean-looking stripe-pattern. It is not recommended for delicate turf, D Models, or machines equipped with a Hi-Dump® due to the increased turning friction/resistance at the contact patch of the tail wheel.

P/N 8049




Adjustable Footrests

These Adjustable Footrests clamp onto the carrier frame. They are easy to install and adjust, making for a comfortable ride for operators. They are not compatible with decks fitted with a Height Adjuster.

36", 42", 48", 52"P/N 8662-10
74"P/N 8662-9

Better comfort for
operators of all heights

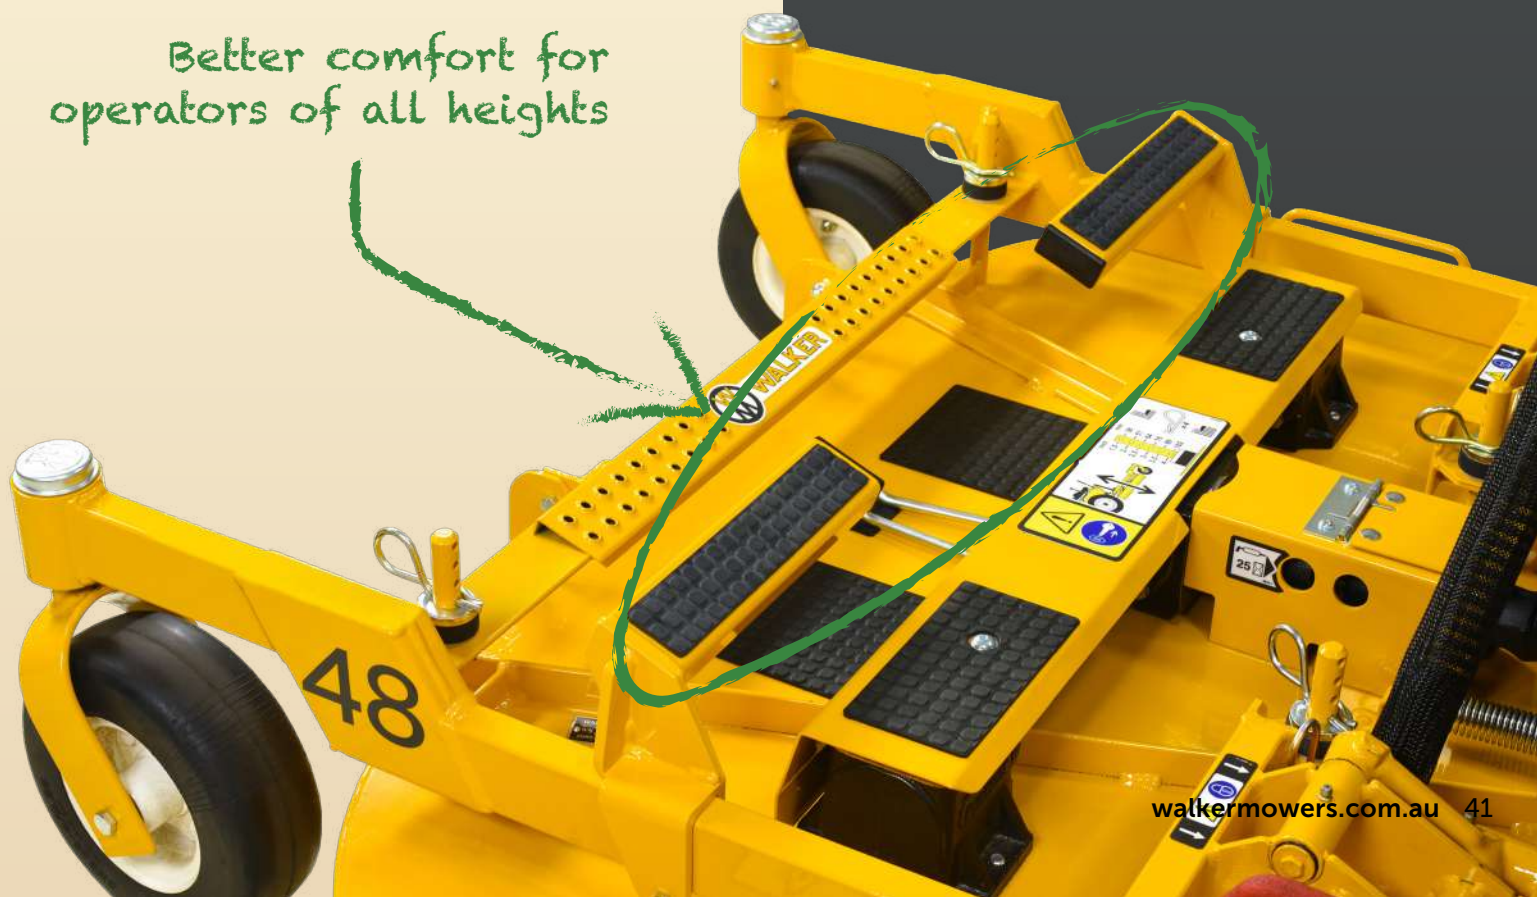

Add-ons: Options

Tail Wheel Lock

The Tail Wheel Lock uses a locking solenoid and detent to hold the tail wheel into a "straight ahead" position. This dramatically improves the ability to create straight stripes and stability for hillside mowing. An On/Off toggle switch located on the Forward Speed Control makes it easy to control from the operator seat. **P/N 8540**

Big Tire Fork Kit

This kit, available for the Model B only, uses a larger, 20" drive tire along with taller tail wheel and deck caster forks. It provides increased cutting heights up to 5", higher ground speed, and improved operator comfort in rough conditions.

For use with 8" Deck Tires P/N 5076-12

For use with 11" Deck Tires..... P/N 5076-13

For use with S60 Deck..... P/N 5076-14

Note: 20" Drive Tires are purchased separately, using P/N 5076-3 Turf Tire or P/N 8070-20 AT Tire.



Lock tail wheel in "straight ahead" position to help create straight stripes

For faster, more comfortable operation



Taller Deck Caster Forks

Larger, 20" Drive Tires

Taller Tail Wheel Fork

Use on narrow decks



Preferred for delicate
turf and hills



Turf Tires

18 x 7-8 Turf Tire

The 18 x 7-8 Turf Tire is ideal for use with narrow decks, attachments, or implements. With these tires, the overall width of the tractor stays within the cut width of Walker's 36" decks. Compatible with Models S, C19, T, D, R, and B. **P/N 5033-6**

18 x 8.5-10 Turf Tire

The 18 x 8.5-10 Turf Tire features a low profile sidewall for increased stability on slopes and less sidewall flex in turns. The 18 x 8.5-10 Turf Tire keeps overall tractor width less than 42", ideal for narrower decks, attachments, or implements. This tire is standard on Models B, C, S18, and Models T and D with ROPS. Compatible with Models S, C, T, D, R, and B. **P/N 5075-3**

Standard on Models B, C,
S and T & D with ROPS

18 x 9.5-8 Turf Tire

The 18 x 9.5-8 Turf Tire is a good balance of low ground pressure, operator comfort, and deck overhang for trimming ability. It is the standard tire on Model T and Model D Walker Mowers without ROPS. Compatible with Models S, C, T, D, R, and B. **P/N 7070-2**

Standard on Models T
and D without ROPS

18 x 10.5-10 Turf Tire

The 18 x 10.5-10 Turf Tire provides optimum traction and a large contact area, reducing ground pressure and protecting the turf. The low profile sidewall improves hillside handling. Due to its width, and for optimal trimming, it should be paired with 48" or larger decks. Compatible with Models C, T, D, B, and R. **P/N 8075-4**

Add-ons: Options

All Terrain Tires

18 x 7-8 Directional AT Tire

The 18 x 7-8 AT Tire features a high-traction, directional tread. It is ideal for increased traction in a variety of situations such as snow removal, dirt work, and mowing where a narrow, aggressive tire is needed. It is perfectly paired with the 36" Single-Stage Snowblower, the 48" Dozer Blade, or 36" and 42" decks. Compatible with Models S, C19, T, D, R, and B.

Left Drive Tire: P/N 5034-1

Right Drive Tire: P/N 5034-2

Pair with 36" snowblower,
48" dozer blade, or
36-42" decks



Improved trimming
capability, and dozer
blade side reach



18 x 8.5-10 AT Tire

These aggressive 18 x 8.5-10 high-traction tires feature increased traction useful for snow removal, dirt work, and other challenging mowing conditions. The tire width maximizes deck overhang for improved trimming capability, as well as dozer blade overhang to increase blade side reach. Compatible with Models S, C, T, D, R, and B. **P/N 8070-9**

18 x 11-10 AT Tire

The 18 x 11-10 All Terrain Tire is ideal for increased traction in a variety of situations ranging from hillside mowing to snow removal. It also features a low profile sidewall for increased stability and performance. Compatible with Models C, T, D, R, and B.

P/N 8070-12

✓ Standard on Model H

23 x 10.5-12 AT Tire

The 23 x 10.5-12 All-Trail Tire features a moderately aggressive, bi-directional tread pattern ideal for challenging turf applications. The All-Trail Tire improves traction and hillside performance for the Model H. Compatible with Model H. **P/N 2071-4**

↑
Increased traction and
performance on hillsides



Ideal for snow, dirt,
and challenging
mowing conditions



23 x 10.5-12 Directional AT Tire

The 23 x 10.5-12 Directional All-Terrain Tire provides improved traction for the Model H and is ideal for snow, dirt, and challenging mowing and implement conditions. The Directional AT tread layout is open enough to shed snow and mud, yet the tire rolls smoothly and performs well on manicured turf. Compatible with Model H.

Left Tire: P/N 2070-5

Right Tire: P/N 2070-6

Standard tires on
most Walker decks



Deck Tires

Semi-Pneumatic Deck Tire

Never again experience the downtime of having a flat deck tire. The Semi-Pneumatic Deck Tires are molded, structural rubber with a hollow core, and come standard on most Walker Decks. Compatible with Models S, C, T, D, and B.

Tire, wheel and axle assembly: P/N 5715-23

Tire only: P/N 5715-16

Can adjust air pressure



Pneumatic Deck Tire

For operators who like the ability to fine-tune the performance and ride of their Walker Deck, we offer a pneumatic tire option. The Pneumatic Deck Tires replace the standard semi-pneumatic tires and allow for adjustment of air pressure. Compatible with Models S, C, T, D, and B.

Tire and inner tube only: P/N 5715-15

Tire, inner tube, and wheel assembly: P/N 5715-24

Add-ons: Compatibility

	Models						
	S	C	T	D	R	B	H
Implements							
Implement Hitch ¹		●	●	●		●	●
47" Rotary Broom		●	●	●		●	
60" Rotary Broom							●
48" Dozer Blade		●	●	●		●	●
60" Dozer Blade			●	●			●
Loader Bucket			●	●			
Attachments							
ROPS		●	●	●			●
Dethatcher ²	●	●	●	●		●	
Boom Sprayer ²	●	●	●	●		●	●
48" Dozer Blade	●	●	●	●	●	●	
Options							
Comfort Seat	●	●	●	●	●	●	
Suspension Seat	●	▲	●	●		●	●
Armrests	●	●	●	●	●	●	●
Utility Bed			●	●		●	
Headlights	●	▲	●	●	●	●	●
Cup Holder	●	●	●	●		●	●
Instrument Panel Cover			●	●			
Tail Weights		▲	●	●		●	●
Power Dump	●	●	●	●			

● Compatible. ▲ Compatible with Models C19, not C23i.

¹ Required for use of compatible implements. ² Visit walker.com for a full list of compatible decks.

Models

S

C

T

D

R

B

H

Options (continued)

Hi-Dump®			●	●			
Large Hole Screen	●	●	●	●			
No-Catch Deflector	●	●	●	●			
GHS Blower Lockout		▲	●	●			
Dump Bag	●	●	●	●			
Dump Bins		X	●	●			
Deck Height Adjuster ²	●	●	●	●		●	●
Deck Height Washers ²	●	●	●	●		●	●
Curb Jumper ²	●	●	●	●		●	●
Power Tilt-Up®							●
Breakaway Blades ²	●	●	●	●		●	
Adjustable Footrests ²	●	●	●	●		●	●
Deck Cuff ²	●	●	●	●			
Spread Axle Tail Wheel		▲	●	●			
Dual Tail Wheel		X	●	●			
Single Wide Tail Wheel		X	●	●			
Tail Wheel Lock			●	●			
18 x 7-8 Turf Tire	●	▲	●	●		●	
18 x 8.5-10 Turf Tire	●	●	●	●	●	●	
18 x 9.5-8 Turf Tire	●	●	●	●		●	
18 x 10.5-10 Turf Tire		●	●	●	●	●	
18 x 7-8 Directional AT Tire	●	▲	●	●		●	
18 x 8.5-10 AT Tire	●	●	●	●	●	●	
18 x 11-10 AT Tire		●	●	●	●	●	
23 x 10.5-12 AT Tire							●
23 x 10.5-12 Directional AT Tire							●
Semi-Pneumatic Deck Tire ²	●	●	●	●		●	
Pneumatic Deck Tire ²	●	●	●	●		●	
Tire Chains ³	●	●	●	●	●	●	●

● Compatible. ² Visit walker.com for a full list of compatible decks. ³ Visit walker.com for a full list of compatible tires. ▲ Compatible with Models C19, not C23i. X Compatible with Model C23i only.

Walker Mower Specifications

	S18	C19	C23i	T23	T27i	D21d	R22	B23	B27i	H24d	H38i
Engine	B&S Vanguard	Kohler CH620	Kohler ECH730	Kohler CH680	Kohler ECH749	Kubota D722	Kohler K1620	Kohler CH680	Kohler ECH749	Kohler KDW1003	Kohler ECH980
Fuel System	Carb	Carb	EFI	Carb	EFI	Diesel	Carb	Carb	EFI	Diesel	EFI
Cooling System	Air	Air	Air	Air	Air	Liquid	Air	Air	Air	Liquid	Air
Displacement, cc	570	674	747	674	747	719	660	674	747	1028	999
HP @ 3600 RPM	18	19	23	22.5	26.5	20.9	21	22.5	26.5	23.7	38
Max Torque, ft-lbs	29.2	35	38.1	36.8	40	34	35.9	36.8	40	36.8	53
Fuel Capacity, US gal (liter)	4 (15.1)	4 (15.1)	4.7 (17.8)	4.7 (17.8)	4.7 (17.8)	4.7 (17.8)	3 (11.4)	4.7 gal (17.8)	4.7 (17.8)	9.4 (35.6)	9.4 (35.6)
Drive Tire Size, diameter x width	18x8.5	18x8.5	18x8.5	18x9.5	18x9.5	18x9.5	18x8.5	18x8.5	18x8.5	23x10.5	23x10.5
Top Speed, MPH (km/h)	7.4 (12)	6.5 (10.5)	8 (13)	6.5 (10.5)	6.5 (10.5)	6.5 (10.5)	6.5 (11.3)	8 (13)	8 (13)	10 (16)	10 (16)
Tractor + Deck ¹ Length inch (cm)	89.25 (226.69)	89.25 (226.69)	96.25 (244.47)	93 (236.22)	93 (236.22)	93 (236.22)	93.1 (236.22)	90.75 (230)	90.75 (230.50)	107 (271.78)	108 (274.32)
Tractor + Deck ¹ Tilted Length inch (cm)	77 (195.58)	77 (195.58)	77 (195.58)	77 (195.58)	77 (195.58)	77 (195.58)	77 (195.58)	72 (183)	72 (182.88)	87.75 (222.88)	87.75 (222.88)
Height, inch (cm)	46.5 (118.11)	47.5 (120.65)	50 (127)	50 (127)	50 (127)	50 (127)	42 (106.68)	39.5 (100)	39.5 (100.35)	50.5 ³ (128.27)	46.5 (118.11)
Tractor Only Width, inch (cm)	38.5 (98)	37.75 (95.88)	41 (104.14)	39 (99.06)	39 (99.06)	39 (99.06)	39 (99.06)	38.5 (98)	38.5 (97.79)	46.5 (118.11)	46.5 (118.11)
Tractor Only Weight, lb (kg)	675 (306)	734 (333)	780 (354)	790 (358)	787 (357)	959 (435)	404 (183)	610 (277)	610 (277)	997 (452)	802 (364)
Tractor + Deck ² Weight, lb (kg)	866 (393)	925 (420)	999 (453)	1009 (458)	1006 (457)	1178 (534)	575 (260)	848 (385)	848 (385)	1434 (650)	1239 (562)

¹S, C19, C42, C23i, T and D: C48, R: S48, B: M48, H: R64, ²S, C36, and C19, C42, C23i, T and D: C48, R: 42" B: S48, H: R64, ³ROPS folded. Note: The A21 Hi-Dump Kit weighs 175 lbs (79 kg).

Standard Features

- Gasoline engines require unleaded 87+ octane
- Diesel engines require 2-D
- Full pressure lube systems with filter
- Heavy-duty stamped steel cutting blades, tempered
- Flywheel alternator charging, D21d has belt-driven alternator
- Internal mechanical parking brake
- Safety circuitry provided by safety switches: Seat, transmission neutral, blade clutch, and parking brake
- Electric blade clutch with easy pull/push switch operation on Models R, B, S and C23i
- Dual-lever steering, precision friction-lock Forward Speed Control lever with neutral/park position
- All machines feature dual, independent hydrostatic transmissions
- Cutting height 1.5" to 4", 1.5" to 4.5", or 1" to 5", varies per model
- Welded, heavy gauge, steel chassis
- Decks and add-ons powered by splined PTO shaft with dual u-joints allowing dynamic articulation, except for the Model R
- Deck carrier frame with flexible deck suspension, caster wheels, and counterweight springs
- Welded, 14 gauge steel bodies
- Welded, 11 gauge steel decks
- 12V electrical systems
- Blade clutch and brake with manual belt tightener C19, T, D, H

